


Generation 3 Traffic Doors

www.worldmanufacturing.com | Call (800) 722-3539

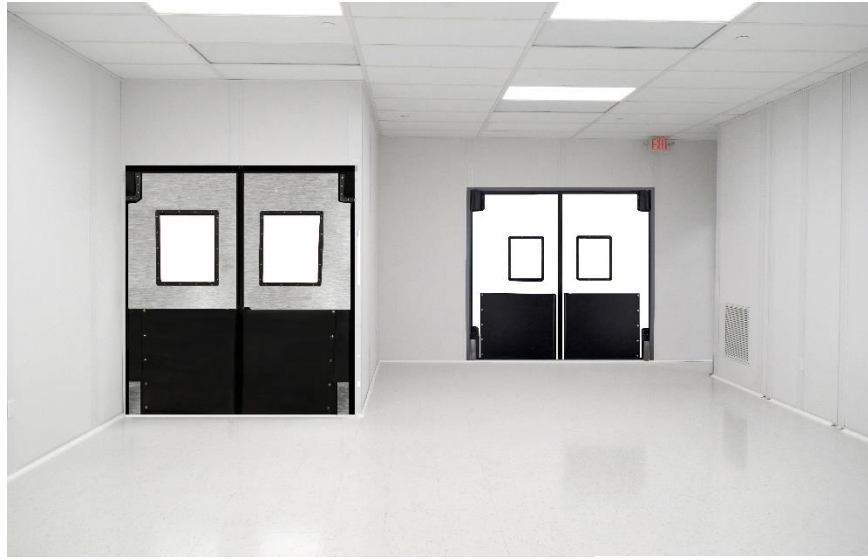

Technical Specifications:

- 1 1/8" thick door panels.
- Our new, one-of-a-kind pivot-hinge system.
- Internally welded steel frame.
- Comprised of hermetically sealed steel and tempered hard board.
- Thick, FDA-approved Elastomeric Coating with diamond-texture finish.
- Standard 13"X17" in each door panel with available options for larger windows.
- 3/16" thick polycarbonate windows in each door panel, set in high-impact urethane frames.
- Opens with approximately 3 lbs of pressure.
- Available in single and double door configurations.
- Options for Impact Plates and Tear Drop Bumpers.

Features:

- Designed for all applications, including light fork-lift traffic.
- Ideal for areas with negative air pressure. Doors will stay at the center.
- Heavy-duty pivot-hinge designed to extend life of doors.
- Steel reinforced frames are internally welded to prevent panels from warping.
- Available in standard and custom sizes.
- Designed for standard sizes up to 8' wide X 8' high.
- Larger sizes available, please call the factory for more information.
- Available finishes in solid colors (see color chart), or stainless steel.



Pivot-hinge system ensures door panels always return to center.

Generation 3 Traffic Doors

www.worldmanufacturing.com | Call (800) 722-3539



Internally welded steel frame prevents panels from warping.