WORLD MANUFACTURING, INC.
worldmanufacturing.com
(800) 722-3539

GENERATION III
Traffic Doors

DURABLE SOLUTION FOR HIGH-TRAFFIC AREAS
Built for performance, cleanliness and long-lasting reliability.

TECHNICAL SPECIFICATIONS

- 1 1/8" thick door panels.
- Our new, one-of-a-kind pivot-hinge system.
- Comprised of hermetically sealed steel and High-impact ABS.
- Thick, FDA-approved Elastomeric Coating with diamond-texture finish.
- 3/16" thick polycarbonate windows in each doorpanel, set in high-impact urethane frames.
- Opens with approximately 3 lbs of pressure.
- Available in single and double door configurations.
- Options for Impact Plates and Tear Drop Bumpers.

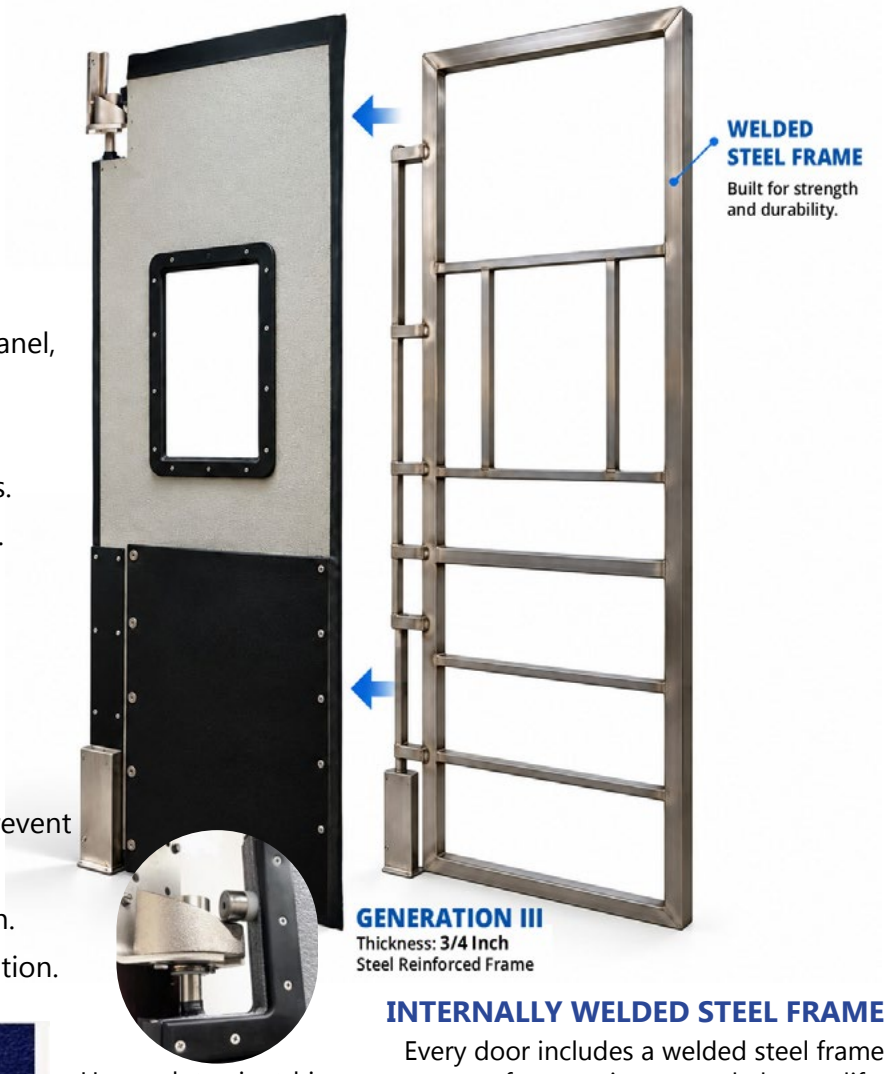

FEATURES

- Designed for all applications, including light fork-lift traffic.
- Ideal for areas with negative air pressure.
- Steel reinforced frames are internally welded to prevent panels from warping.
- Designed for standard sizes up to 8' wide X 8' high.
- Larger sizes available, please call for more information.

AVAILABLE COLORS

Heavy-duty pivot-hinge designed to extend life of doors.

INTERNALLY WELDED STEEL FRAME

Every door includes a welded steel frame for superior strength, longer life, and reliable performance.

SINGLE PANEL CONFIGURATIONS

Custom widths up to 36" & custom heights up to 84" available

Model #	Opening Width	Opening Height	Weight
RTIII3684S	36"	84"	95 lbs
RTIII4284S	42"	84"	111 lbs
RTIII4884S	48"	84"	127 lbs

ACCESSORIES

Galvanized door frames and other accessories are available. Call today for a complete list of compatible accessories.

DOUBLE PANEL CONFIGURATIONS

Custom widths up to 96" & custom heights up to 96" available

Model #	Opening Width	Opening Height	Weight
RTIII4884D	48"	84"	138 lbs
RTIII6084D	60"	84"	172 lbs
RTIII7284D	72"	84"	207 lbs
RTIII8484D	84"	84"	241 lbs
RTIII9684D	96"	84"	275 lbs

Model #	Opening Width	Opening Height	Weight
RTIII4896D	48"	96"	177 lbs
RTIII6096D	60"	96"	211 lbs
RTIII7296D	72"	96"	236 lbs
RTIII8496D	84"	96"	275 lbs
RTIII9696D	96"	96"	315 lbs