WORLD MANUFACTURING, INC.
worldmanufacturing.com
(800) 722-3539

Ruff TUFF II
Traffic Doors

DURABLE SOLUTION FOR HIGH-TRAFFIC AREAS
Built for performance, cleanliness and long-lasting reliability.

TECHNICAL SPECIFICATIONS

- 1 1/8" thick door panels.
- Comprised of hermetically sealed steel and High-impact ABS.
- Thick FDA-approved Elastomeric coating with
- diamond-texture finish.
- 3/16" thick polycarbonate shatter-proof window
- set in a high-impact urethane frame.
- Aluminum Jamb Guard.
- Opens with approximately 1 pound of pressure.

FEATURES

- Ideal for restaurants, supermarkets, office & retail environments.
- FDA-approved Elastomeric coating resists scuffs, dings, and scarring.
- Ideal for heavy walk-through traffic, and light pallet-jack traffic.
- Optional add-ons for gasketing, tear drop bumpers, and ABS impact plates.
- Ideal in wash-down environments and areas with salt-based chemicals.



AVAILABLE COLORS



INTERNALLY WELDED STEEL FRAME

Every door includes a welded steel frame for superior strength, longer life, and reliable performance.

SINGLE PANEL CONFIGURATIONS

Shown with optional Impact Plates
Custom widths up to 48" & custom heights up to 96"



Model #	Opening Width	Opening Height	Weight
RT23184S	31"	84"	91 lbs
RT23196S	31"	96"	104 lbs
RT23684S	36"	84"	106 lbs
RT23696S	36"	96"	121 lbs
RT24884S	48"	84"	141 lbs
RT24896S	48"	96"	161 lbs


ACCESSORIES



Galvanized door frames and other accessories are available. Call today for a complete list of compatible accessories.

DOUBLE PANEL CONFIGURATIONS

Shown with optional Impact Plates
Custom widths up to 48" & custom heights up to 96"

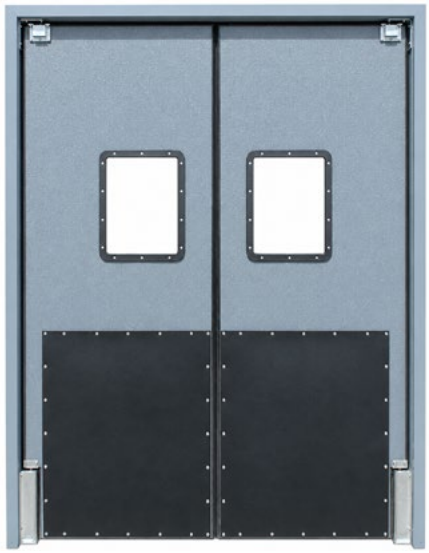

Model #	Opening Width	Opening Height	Weight
RT23678D	36"	78"	112 lbs
PRO3684D	36"	84"	121 lbs
RT24884D	48"	84"	161 lbs
RT24896D	48"	96"	184 lbs
RT26084D	60"	84"	202 lbs
RT26096D	60"	96"	230 lbs
RT27284D	72"	84"	242 lbs
RT27296D	72"	96"	276 lbs
RT28484D	84"	84"	282 lbs
RT28496D	84"	96"	323 lbs
RT29684D	96"	94"	323 lbs
RT29696D	96"	96"	369 lbs